




AL1

Type AL 1

| Outer diameter of tube | Outer diameter for sink outflow | Max. wall thickness (in mild steel) | Max. wall thickness (stainless steel) | Weight |
|------------------------|---------------------------------|-------------------------------------|---------------------------------------|--------|
| ø 27,9 mm | | 4,0 mm | 3,0 mm | |
| ø 34,8 mm | | 4,0 mm | 3,0 mm | 8,0 kg |
| ø 42,8 mm | | 4,0 mm | 3,0 mm | |

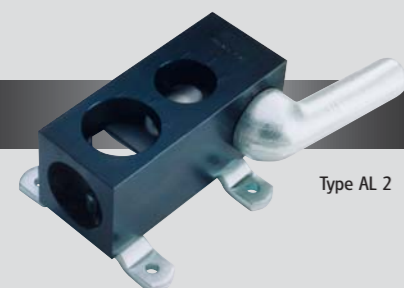

AL2

Type AL 2

| Outer diameter of tube | Outer diameter for sink outflow | Max. wall thickness (in mild steel) | Max. wall thickness (stainless steel) | Weight |
|------------------------|---------------------------------|-------------------------------------|---------------------------------------|---------|
| ø 49,0 mm | | 4,0 mm | 3,0 mm | |
| ø 61,0 mm | | 4,0 mm | 3,0 mm | 15,0 kg |



The Almi Pipe Notchers

The best tool for welding pipes at an angle of 90°



ALU

Type AL U


| Outer diameter of tube | Outer diameter for sink outflow | Max. wall thickness (in mild steel) | Max. wall thickness (stainless steel) | Weight |
|------------------------|---------------------------------|-------------------------------------|---------------------------------------|--------|
| | ø 27-61,0 mm | 4,0 mm | 3,0 mm | 7,0 kg |



AL1-2E

Type AL 1-2E
Electric motor (2,2 kW)

| Outer diameter of tube | Outer diameter for sink outflow | Max. wall thickness (in mild steel) | Max. wall thickness (stainless steel) | Weight |
|------------------------|---------------------------------|-------------------------------------|---------------------------------------|--------|
| ø 27,9 mm | | 5,0 mm | 4,0 mm | |
| ø 34,8 mm | | 5,0 mm | 4,0 mm | |
| ø 42,8 mm | | 5,0 mm | 4,0 mm | 87 kg |
| ø 49,0 mm | | 5,0 mm | 4,0 mm | |
| ø 61,0 mm | | 5,0 mm | 4,0 mm | |

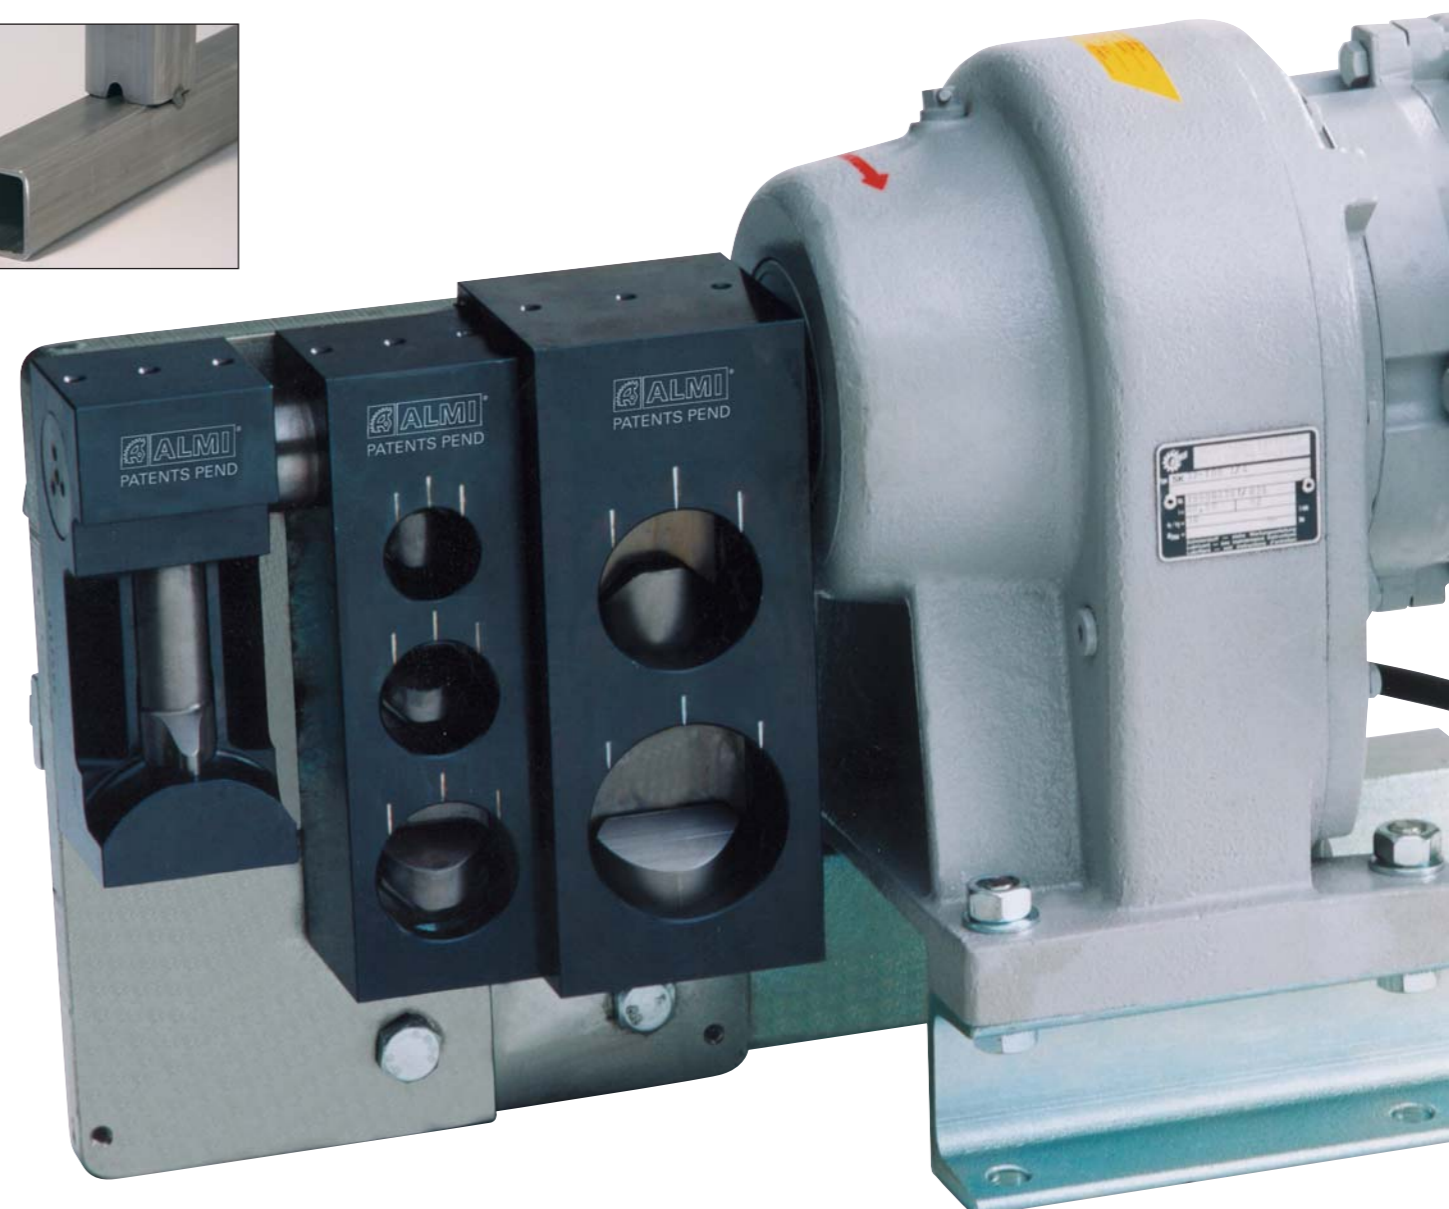

AL1-2U

Type AL 1-2U
Notching combination with sink outflow.
Electric motor (2,2 kW)

| Outer diameter of tube | Outer diameter for sink outflow | Max. wall thickness (in mild steel) | Max. wall thickness (stainless steel) | Weight |
|------------------------|---------------------------------|-------------------------------------|---------------------------------------|--------|
| ø 27,9 mm | | 5,0 mm | 4,0 mm | |
| ø 34,8 mm | | 5,0 mm | 4,0 mm | |
| ø 42,8 mm | ø 27-61,0 mm | 5,0 mm | 4,0 mm | 93 kg |
| ø 49,0 mm | | 5,0 mm | 4,0 mm | |
| ø 61,0 mm | | 5,0 mm | 4,0 mm | |

Almi Pipe Notchers

quality and productivity

ALMI has developed a series of highly efficient manually operated and electrically driven machines for the notching of gas pipes, steam pipes, stainless steel pipes, non-ferrous metal pipes, and many other types of pipes. Wherever pipes need to be welded together at an angle of 90°, ALMI pipe notching machines ensure that the correct slot is cut very quickly and accurately. They are also eminently suitable for making double corner joints.

HIGH PRODUCTIVITY

When you use ALMI pipe notching machines, you no longer need to file out or to mill pipes. The great advantage they have over other notching machines is that a single unit can be used to notch pipes of various diameters without having to change parts.

SEVERAL DIAMETERS IMMEDIATELY AVAILABLE

Unlike punch-cutting machines, which use separate auxiliary tools, the ALMI pipe notcher is always ready for work straightaway. And its price is even well below that of the auxiliary tool just mentioned.

ALSO FOR SINK OUTFLOW

ALMI also supplies pipe notching machines for cutting out venting slots in round and square-section steel pipes with

outside diameters from 27 mm upwards and with a wall thickness of 4 mm maximum.


ELECTRIC DRIVE

For intensive use, ALMI has developed a notching machine with a 2.2 kW electric motor. The motor forms one unit with the special eccentric shaft that drives the notching tool. The motor is also fitted with an on/off switch with zero-voltage protection and a guard.

HAND OPERATION

The hand-operated machines can be mounted on a wall very easily. The special eccentric shaft transmission and the lever system enable you to transfer considerable force with minimal effort.

Type AL 1-2U

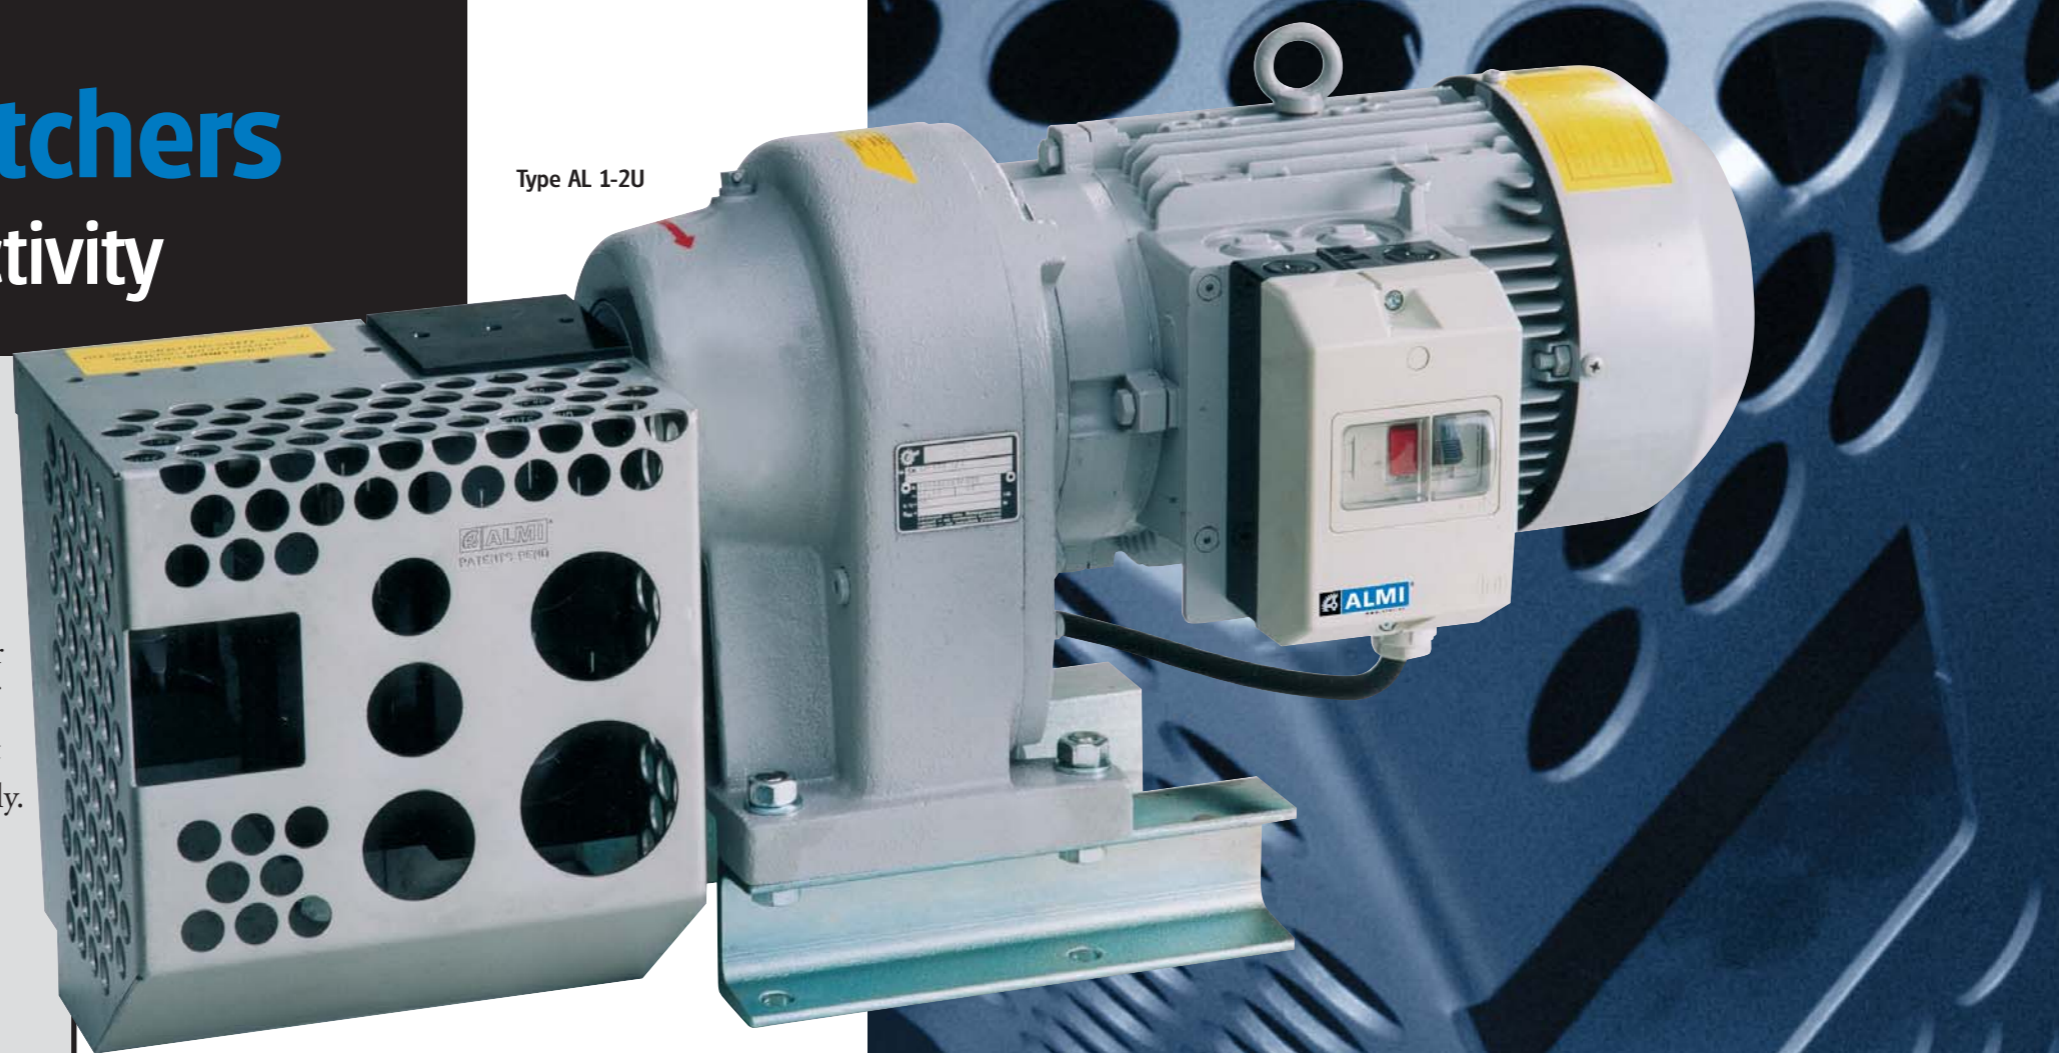

Almi Pipe Notchers manually operated and electrically driven



With the AL U you can easily cut out a sink outflow.




For situations many notches have to be made, Almi makes notching machines with a 2.2 kW electric motor.



The hand-operated machines can be mounted on a wall very easily.




Simple and fast operation.

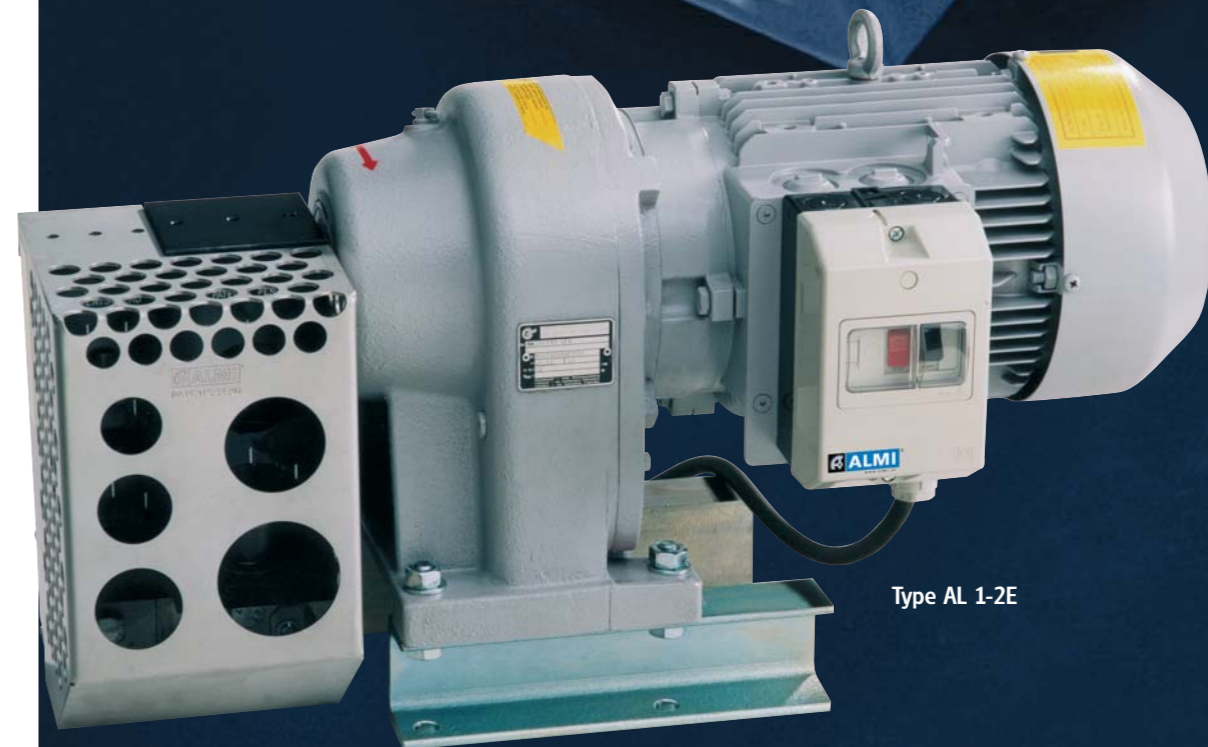

Type AL 1-2E

THE AVANTAGES AT A GLANCE

- High productivity
- Low investments
- Fast and easy operation
- Several diameters directly available
- Ideal for double corner joints



ALSO FOR SINK OUTFLOW

ALMI also supplies pipe notching machines for cutting out venting slots in round and square-section steel pipes.



QUALITY CONTROL

All ALMI products are subject to rigorous quality control before leaving our company.



THE ALMI PIPE NOTCHER

High productivity at low costs. A sound investment.